

SD4700P Universal USB-C and USB 3.0 Docking Station

Part Number: K38240NA

UPC Code: 8588938240



Supporting the latest USB-C connections, and legacy computers with USB 3.0 ports, the SD4700P Universal USB-C and USB 3.0 Docking Station is the ideal docking solution for evolving computer environments. Engineered using the most stable and trusted technology, the SD4700P provides compatibility that just works. Exhaustively tested with new and legacy laptop models, the SD4700P extends the life of your technology investments and is easy and painless to setup.

FEATURES & BENEFITS


- **Universal Docking Station** is a savvy technology investment for evolving and mixed computer environments - conveniently connecting any laptop equipped with USB-C or USB 3.0 and supporting both Windows and Mac
- **Simple Set-up** allows you to connect and quickly transfer audio, video, data and power (supported USB-C devices with PD function only), keeping your workspace clean and clutter-free, while also easily accommodating roaming computer environments and flexible workspaces
- **DisplayPort++/HDMI** provides flexible video connections with support up to 2560x1600 for a single monitor or 2048x1152 for dual monitors via DisplayLink
- **6 USB Ports** extends the productivity capabilities of today's thin laptops via one USB-C port, and five USB 3.0 ports, one of which is a 2.1A fast-charging port to power up a tablet or smartphone
- **135W Power Supply Adapter** provides ample power for dock and up to 60W of power for devices connected via Power Delivery (PD) USB-C
- **Combo 3.5mm Headphone & Microphone Jack** lets users easily connect their favorite headset
- **Gigabit Ethernet Port** provides a reliable 1Gb wired networking connection between computers for faster downloads from corporate intranet or internet
- **Kensington Security Slot** protects your technology investment via easy implementation of a cable lock
- **Zero Footprint Mounting** provides the option to attach the dock to the back of any VESA® compatible external display

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

FRONT



BACK

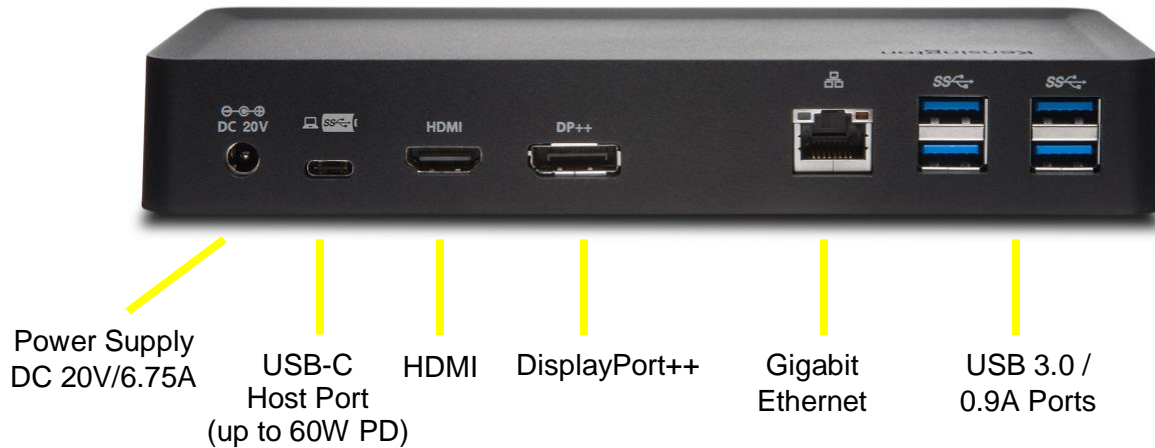

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

Technical Specifications

SYSTEM REQUIREMENT

- **Operating Systems Supported:**
Windows 7 and 10; macOS X 10.13 or later
- **Plug & Play:**
DisplayLink driver installation required
Download software from Kensington.com, or via Windows update
- **System Resource Requirement:** N/A
- **USB-C Power Delivery:**
 - Supports USB-C PD 3.0
 - 5V/9V/12V/20V up to 3A
 - 60W Maximum

HOST CONNECTIVITY

- **Host Docking Connector:** USB-C

VIDEO CONNECTIONS

- **Video Connectors:**
 - HDMI V1.3
 - DisplayPort v1.1 ++ (Passive cables/adapters for HDMI or DVI conversion)
- **Maximum Resolution Supported:**
 - Single Monitor: 2560 x 1600
 - Dual Monitors: 2048 x 1152
- **HDCP Support:** No

AUDIO CONNECTIONS

- **Audio Connectors:**
 - one 3.5mm combo audio port for audio in & out
- **Audio Channels Supported:** Stereo LR

USB CONNECTIONS

- **All Ports:** Support up to 5Gbps transfer rate
- **USB 3.0 Ports:** Five; (1) front with 5V/2.1A fast-charging & (4) back supporting 5V/0.9A
- **USB-C Ports:** Two; (1) front with 5V/3A and (1) rear supporting 60W power delivery

NETWORK CONNECTIONS

- **Ethernet Port:** RJ45
- **Compatible Ethernet Speeds:** 10/100/1000 Mbps

OTHER FEATURES

- **Kensington Security Slot**
- **VESA Mount Compatible:** Mounting plate (K33959WW) sold separately

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.

PRODUCT DIMENSIONS

- **Unit Dimensions without Peripherals:**
 - Width: 200mm (7.9in)
 - Depth: 91.2mm (3.6in)
 - Height: 30.5mm (1.2in)
- **Desktop Footprint:** 182cm² (28in²); n/a if mounted behind VESA compatible monitor
- **Unit Weight:** 1.13kg (39.86oz)
- **Enclosure Color and Material:** Black PC/ABS

PACKAGING DIMENSIONS

- **Packaging Style:** Brown Box (K38240NA & K38240EU); Retail Box (K38240AU)
- **Unit Box:**
 - Width: 215mm (8.46in)
 - Depth: 105mm (4.13in)
 - Height: 109mm (4.29in)
- **Packaging Weight:** 1.63kg (3.6lbs) US power cord only (K38240NA); 1.81kg (4.0lbs) EU & UK power cord (K38240EU/K38240AU)
- **Master Carton:** 4 pcs
 - Width: 448mm (17.64in)
 - Depth: 230mm (9.06in)
 - Height: 138mm (5.43in)
 - Weight: 4.52kg (10.0lbs) (K38240NA); 5.40kg (11.9lbs) (K38240EU)
- **Package Content:**
 - One SD4700P Docking Station
 - One USB-C to USB-C Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter
 - One AC Power Adapter with US power cable included (K38240NA); One AC Power Adapter with EU and UK power cables included (K38240EU); One AC Power Adapter with AU power cable included (K38240AU)
 - One Quick Start Instruction Guide
 - Warranty Information

POWER & ENVIRONMENTAL

- **Power Adapter Rating:**
 - Input: 100-240V; 2.5A Max
 - Output: 20V DC; 6.75A
 - AC: 50/60Hz; 1.8A
- **Operating Temperature:** 0 to 40° C (32 to 140° F)
- **Storage Temperature:** -40 to 70° C (-40 to 158° F)
- **Relative Humidity:** 5% to 95% non-condensing

COUNTRY OF ORIGIN, REGULATORY, AND WARRANTY

- **Country of Origin:** China
- **Certifications & Compliance:** CE, FCC, RCM, REACH, RoHS, WEEE
- **Warranty:** 3-Years Limited - worldwide

All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Brand and product names mentioned are trademarks of their respective companies.